




VANDA FLANGELESS FLUSH FIT TRACK

Seamless Integration, Ultimate Flexibility

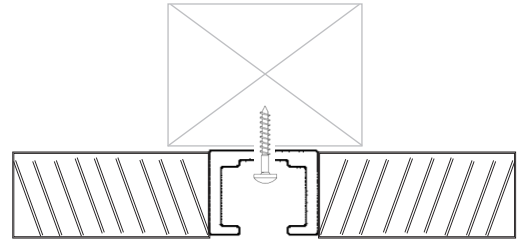

Elevate your interior spaces with the Flangeless Flush Fit track, a discreet curtain solution designed to blend effortlessly into modern architectural designs. Recessed directly into the ceiling, this track screws neatly into a rebate, creating a sleek, flush finish without the need for an overlapping flange.

Engineered for versatility, it works with various ceiling types including precast concrete, hardwood, softwood timber linings, and textured architectural battens. Available in Matt Appliance White or custom powder-coated finishes, the track can be bent on 150mm and 250mm radius formers or rolled to any radius over 1.5m, ensuring it adapts perfectly to your project's requirements.

Whether you're designing for new builds or retrofit applications, the Flangeless Flush Fit track offers architects and designers unparalleled flexibility. It supports both standard and wave carriers, and can also be surface-mounted directly to ceilings without the need for bracketing, making it a versatile choice for any space.

Achieve a minimalist, modern aesthetic with the Flangeless Flush Fit track – where functionality meets refined design.

Technical Information

We strongly recommend builders provide timber fixings above the track rebate. Rebate cutout is critical, please check architectural drawing for further details.

Tracks are available in continuous lengths of up to 6 meters. For longer installations, tracks will need to be butted together.

The standard off-set from the wall for a single track is 50mm or 60mm (you can go as close to 30mm if necessary but this distance will not allow for a wave heading). For straight double track systems, the required spacing between tracks ranges from 50mm to 90mm.

For bent tracks, a fixed spacing of 95mm is needed, with no adjustment possible.

There is a choice of standard glides and end stops for pleated style curtain headings or the Vanda Wave Heading, please contact our office for further details.

Flush Fit track is supplied pre-punched at 500mm centres and has a screw head rebate running through the entire length of the track. We provide pan square self-tapper screws, requiring a No. 1 square drive bit for installation.

Tracks are cut 4mm shorter than the specified length to allow for the size of the end caps.

Flangeless Flush Fit Track (VA.FF.0020), made from Toitu carbon reduced certified Aluminium. designed, manufactured & distributed throughout New Zealand.

0800 826 326
sales@vanda.co.nz
www.vanda.co.nz

