



FLUSH FIT TRACK SINGLE SYSTEM

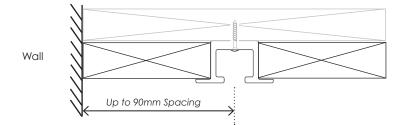

Wall to centre of Flush Fit Track Spacing allowance should be up to 90mm (this does depend on the curtain heading being specified)

FLUSH FIT TRACK DOUBLE SYSTEM

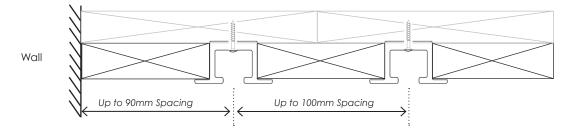

Wall to centre of Flush Fit Track (Back Track) Spacing allowance should be up to 90mm Centre of Flush Fit Track (Back Track) to centre of Flush Fit Track (Front Track) Spacing allowance should be up to 100mm for straight tracks For Bent double tracks, spacing between the tracks must be at 95mm (no adjustment)

Vanda suggests the distances vary between 50-90mm However the above measurements depend on the curtain heading being specified

> VANDA HOLDINGS LTD Unit G, 166 Marua Road, Ellerslie, Auckland 0800 826 326 admin@vanda.co.nz www.vanda.co.nz