



0800 VANDA NZ
(0800 826 326)
Sales@vanda.co.nz
www.vanda.co.nz




Somfy Sonesse 40 RTS 9/12



Specification	Details
Item Number/Code	VA.SMFY.2040 #1002157
Head Colour	Black
Motor Length	551mm
Minimum Blind Width	626mm
Maximum Linked Blind Size	37.8 m ²
Lifting Capacity	27 kg
Nominal Torque	9.0 Nm
Nominal Speed	12 RPM
Limit Switch Type	Electronic
Index Protection Rating	IP 44 (for indoor use only)
Sound Level	40 dBa (at nominal speed)
Power Supply	207V – 253V
Power Consumption	120W
Thermal Time	4 Minutes
Control Options	RF Remote, RF Wall Switch, TaHoma Switch

Somfy Altus/Sonesse 40 RTS Motor (Radio Technology Somfy) wiring:

- Use 2 of 4 core Universal (#9015792/805/806 – 2.3/5/10M) Molex (NO EARTH)

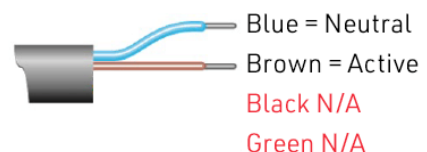

Sonesse 40 RTS

PRODUCT SPECIFICATIONS



Putting window coverings in motion with quiet precision

PRODUCT MAIN FUNCTIONALITIES



Designed for silence



Remote limit setting



Compatible with Solar protection functions



"my" favourite
In one click move the blind to your favourite position.



Slats tilting




Round head
for reduced dimensions.

Somfy+

Quiet operation and all the benefits of RTS technology.

RECOMMENDED TO SET WITH:

Universal test lead
(ref. 9027064)

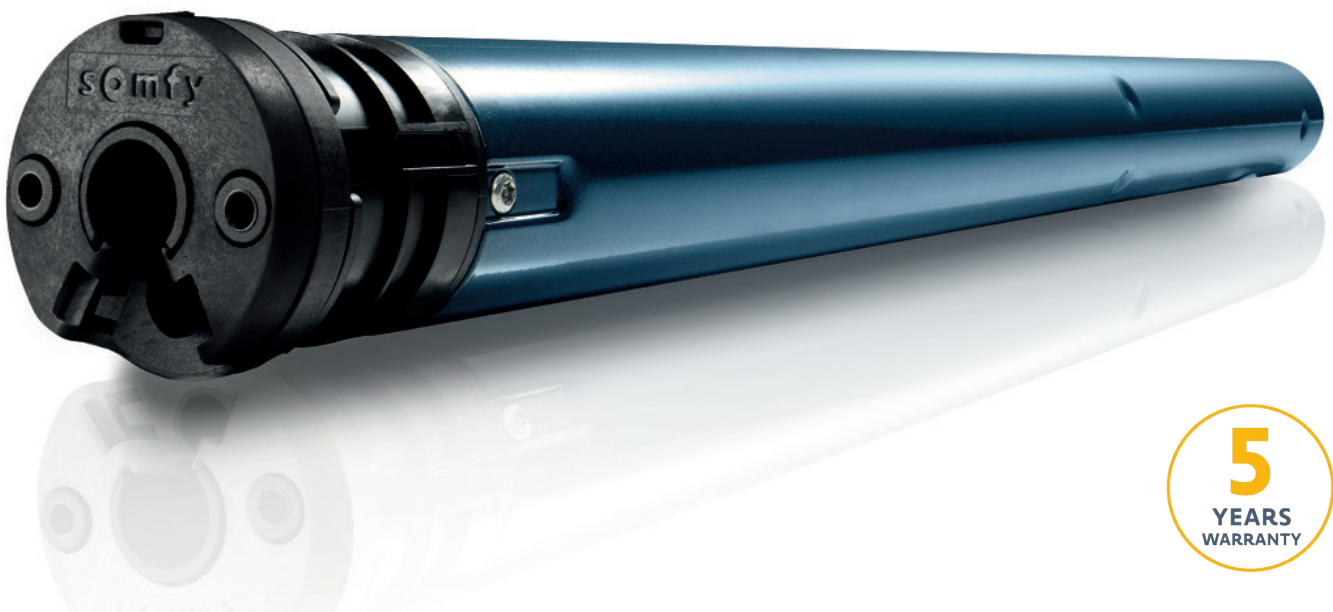

somfy

Sonesse 40 RTS

PRODUCT SPECIFICATIONS



BENEFITS FOR PROFESSIONALS

Easy Integration

- Suitable for tubes diameter 40 mm or more (internal diameter)
- Available with inline connector for ease of programming
- Integrated antenna

Setting from a distance

- Up and down end limits set by remote control
- Visual feedback of the product to confirm any step of setting and programming

BENEFITS FOR END USERS


Simple, effortless control

- Quiet operation
- Move your blinds effortlessly and remotely thanks to the radio control
- Move your blinds to your favourite "my" position in one click

Access to RTS product range for more benefits

- Solar protection functions compatibility

COMPATIBLE END-PRODUCTS

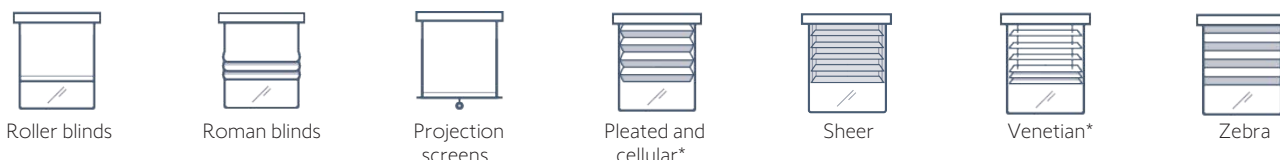

* Using CTS40

TECHNICAL DATA


Thermal Time	4 minutes
Supply	AC
Index protection rating	IP 44 (indoor use only)
Limit switch unit	Electronic
Limit switch capacity	250 turns
Temperature working range	0°C to +60°C
Electric insulation	Class II
Capacity of memory	12 different transmitters plus 3 wireless sensors
Coding	Rolling code with 16 million possibilities

PERFORMANCES

	3/30	6/20	9/12
Nominal Voltage	230V / 50Hz		
Torque (Nm)	3	6	9
Speed (rpm)	30	20	12
Rated Current (A)	0.44	0.55	0.98
Sound Level (dBA)*	42	45	40
End-limit unit versions available	RTS	RTS	RTS
Radio Frequency	433, 42 MHz		
Item Number	1001573	1001577	1001581
Item Number with inline connector	1002091	1002092	1002157

* Power Level (measurement between 20 to 30 degrees Celcius) in dB(A) ref 1pW, motor is at max. sound level when ascending

230 V

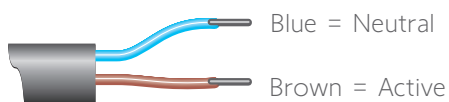

DIMENSIONS

L (mm)	504	535	535
--------	-----	-----	-----

