




VANDA FLUSH FIT TRACK

Flush Fit track Profile - 13mm
Also now available in 10mm

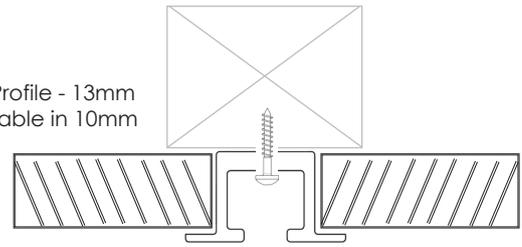

The Flush Fit Track is a recessed curtain track installed directly into the ceiling, eliminating the need for brackets.

Our standard Flush Fit Track is 13mm high, matching the thickness of standard GIB ceiling lining in New Zealand.

We also offer a 10mm option to suit 10mm GIB

Builders must provide timber fixings above the track rebate, and when fitting the GIB lining, they should allow for an 18mm parallel gap in the ceiling sheet to accommodate the track width.

The track features a 5mm flange on either side of the glide channel, ensuring a clean finish as the ceiling sheet rests on the flange edges.

Tracks are available in continuous lengths of up to 6 meters. For longer installations, tracks will need to be butted together. The track can also be custom bent between 90° and 180°, with bend radius of 150mm or 250mm. We supply bent track pieces to assist builders in achieving precise ceiling cuts for a flawless installation.

The standard off-set from the wall for a single track is 50mm or 60mm (*you can go as close to 30mm if necessary but this distance will not allow for a wave heading*). For straight double track systems, the required spacing between tracks ranges from 50mm to 90mm. For bent tracks, a fixed spacing of 95mm is needed, with no adjustment possible.

There is a choice of standard glides and end stops for pleated style curtain headings or the Vanda Wave Heading, please contact our office for further details.

Flush Fit track is supplied pre-punched at 500mm centres and has a screw head rebate running through the entire length of the track. For the 13mm Flush Fit track, we provide pan square self-tapper screws, requiring a No. 1 square drive bit for installation. For the 10mm Flush Fit track, pan Pozi screws are supplied, so a Pozi drive bit will be needed.

Tracks are cut 11mm shorter than the given length so that access to the glides is possible without having to take down the track.

Please note there has been a change - if Flush Fit tracks are measured to fit between walls and you are using End stop/End caps for centre closing drapes, tracks will need to have the End stop/End cap and glides fed onto the track before you screw it into place.

Fitters are to position one end of the track hard up to one end to allow the 11mm gap at the other. The cover plate attached to the end stop covers the gap.

Flush Fit track comes in our standard "White" and can also be custom powdercoated to suit - POA



0800 826 326
sales@vanda.co.nz
www.vanda.co.nz